


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5330	
	RATIONALE THIS DOCUMENT IS BEING STABILIZED AT THE REQUEST OF PROCURING ORGANIZATIONS FOR APPLICATIONS SPECIFIC TO ENGINE AND ENGINE CONTROL SYSTEMS. FOR HYDRAULIC AND PNEUMATIC APPLICATIONS AS83248/2 SHOULD BE USED. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE A-6C2 SEALS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
AS3581™	For more information on this standard, visit https://www.sae.org/standards/content/AS3581A/ THIRD ANGLE PROJECTION 	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: NONE
	AEROSPACE STANDARD PACKING, PREFORMED - O-RING SEAL AMS7259	AS3581™ REV. A

ISSUED 1996-11 REAFFIRMED 2018-08 STABILIZED 2020-05

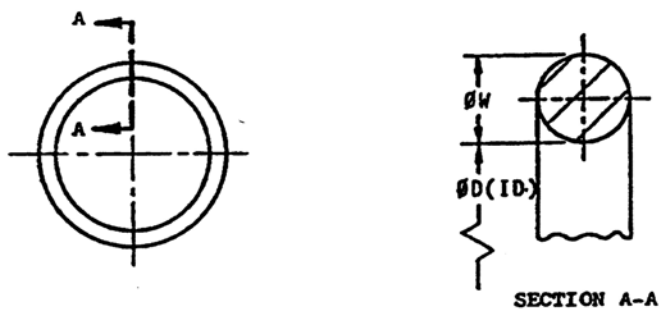


FIGURE 1

TABLE 1 - DIMENSIONS

DASH NO.	ϕD	ϕW	APPROX MASS lb/100
-001	.025 - .033	.037 - .043	.0014
-002	.038 - .046	.047 - .053	.0028
-003	.052 - .060	.057 - .063	.0046
-004	.065 - .075	.067 - .073	.0078
-005	.096 - .106	.067 - .073	.0097
-006	.109 - .119	.067 - .073	.0101
-007	.140 - .150	.067 - .073	.0120
-008	.171 - .181	.067 - .073	.0138
-009	.203 - .213	.067 - .073	.0156
-010	.234 - .244	.067 - .073	.0170
-011	.296 - .306	.067 - .073	.0207
-012	.359 - .369	.067 - .073	.0239
-013	.421 - .431	.067 - .073	.0276
-014	.484 - .494	.067 - .073	.0313
-015	.544 - .558	.067 - .073	.0345
-016	.605 - .623	.067 - .073	.0382
-017	.667 - .685	.067 - .073	.0414
-018	.730 - .748	.067 - .073	.0451
-019	.792 - .810	.067 - .073	.0483
-020	.855 - .873	.067 - .073	.0520
-021	.917 - .935	.067 - .073	.0552
-022	.979 - .999	.067 - .073	.0589
-023	1.041 - 1.061	.067 - .073	.0626
-024	1.104 - 1.124	.067 - .073	.0658
-025	1.165 - 1.187	.067 - .073	.0695
-026	1.228 - 1.250	.067 - .073	.0727
-027	1.290 - 1.312	.067 - .073	.0764
-028	1.351 - 1.377	.067 - .073	.0796
-029	1.476 - 1.502	.067 - .073	.0865
-030	1.601 - 1.627	.067 - .073	.0938

TABLE 1 (CONTINUED)

DASH NO.	ϕ D	ϕ W	APPROX MASS lb/100
-031	1.724 - 1.754	.067 - .073	.1007
-032	1.849 - 1.879	.067 - .073	.1076
-033	1.971 - 2.007	.067 - .073	.1145
-034	2.096 - 2.132	.067 - .073	.1214
-035	2.221 - 2.257	.067 - .073	.1283
-036	2.346 - 2.382	.067 - .073	.1352
-037	2.471 - 2.507	.067 - .073	.1421
-038	2.594 - 2.634	.067 - .073	.1495
-039	2.719 - 2.759	.067 - .073	.1564
-040	2.844 - 2.884	.067 - .073	.1633
-041	2.965 - 3.013	.067 - .073	.1702
-042	3.215 - 3.263	.067 - .073	.1840
-043	3.465 - 3.513	.067 - .073	.1978
-044	3.712 - 3.766	.067 - .073	.2121
-045	3.962 - 4.016	.067 - .073	.2259
-046	4.209 - 4.269	.067 - .073	.2397
-047	4.459 - 4.519	.067 - .073	.2535
-048	4.709 - 4.769	.067 - .073	.2673
-049	4.952 - 5.026	.067 - .073	.2815
-050	5.202 - 5.276	.067 - .073	.2953
-102	.044 - .054	.100 - .106	.0184
-103	.076 - .086	.100 - .106	.0221
-104	.107 - .117	.100 - .106	.0258
-105	.138 - .148	.100 - .106	.0294
-106	.169 - .179	.100 - .106	.0336
-107	.201 - .211	.100 - .106	.0373
-108	.232 - .242	.100 - .106	.0409
-109	.294 - .304	.100 - .106	.0483
-110	.357 - .367	.100 - .106	.0561
-111	.419 - .429	.100 - .106	.0635
-112	.482 - .492	.100 - .106	.0708
-113	.542 - .556	.100 - .106	.0787
-114	.603 - .621	.100 - .106	.0860
-115	.665 - .683	.100 - .106	.0934
-116	.728 - .746	.100 - .106	.1012
-117	.789 - .809	.100 - .106	.1086
-118	.852 - .872	.100 - .106	.1164
-119	.914 - .934	.100 - .106	.1237
-120	.977 - .997	.100 - .106	.1311
-121	1.039 - 1.059	.100 - .106	.1389
-122	1.102 - 1.122	.100 - .106	.1463
-123	1.162 - 1.186	.100 - .106	.1536
-124	1.225 - 1.249	.100 - .106	.1615
-125	1.287 - 1.311	.100 - .106	.1688
-126	1.350 - 1.374	.100 - .106	.1762
-127	1.412 - 1.436	.100 - .106	.1840
-128	1.475 - 1.499	.100 - .106	.1914
-129	1.534 - 1.564	.100 - .106	.1987
-130	1.597 - 1.627	.100 - .106	.2065
-131	1.659 - 1.689	.100 - .106	.2139
-132	1.722 - 1.752	.100 - .106	.2217
-133	1.784 - 1.814	.100 - .106	.2291
-134	1.847 - 1.877	.100 - .106	.2364
-135	1.908 - 1.942	.100 - .106	.2443



AEROSPACE STANDARD

PACKING, PREFORMED - O-RING SEAL
AMS7259AS3581™
SHEET 2 OF 9REV.
A
Documents

Document Sharing Hub